



Sistemi Retrofit per Impianti Anti-deflagranti *Retrofit Application for Explosion Proof Systems*



Headquarters:

Via Tito Speri, 10

25024 Leno (Brescia) ITALY

Tel. +39 030 90451

Fax +39 030 9045330

info@cobospa.it

www.cobospa.it

Via Pasquale Pastorino, 38/44

16162 Bolzaneto (Genova) ITALY

Tel. +39 010 8596800

Fax +39 010 8596898


info@3bmust.com

www.3b6.it



NOVA TESTINGS PTE LTD
280 Woodlands Industrial Park E5
#02-41 Harvest @ Woodlands
Singapore 757322
Tel: (65) 6561 1002 Fax: (65) 6561 2003
Email: sales@novatestings.com
Website: www.novatestings.com



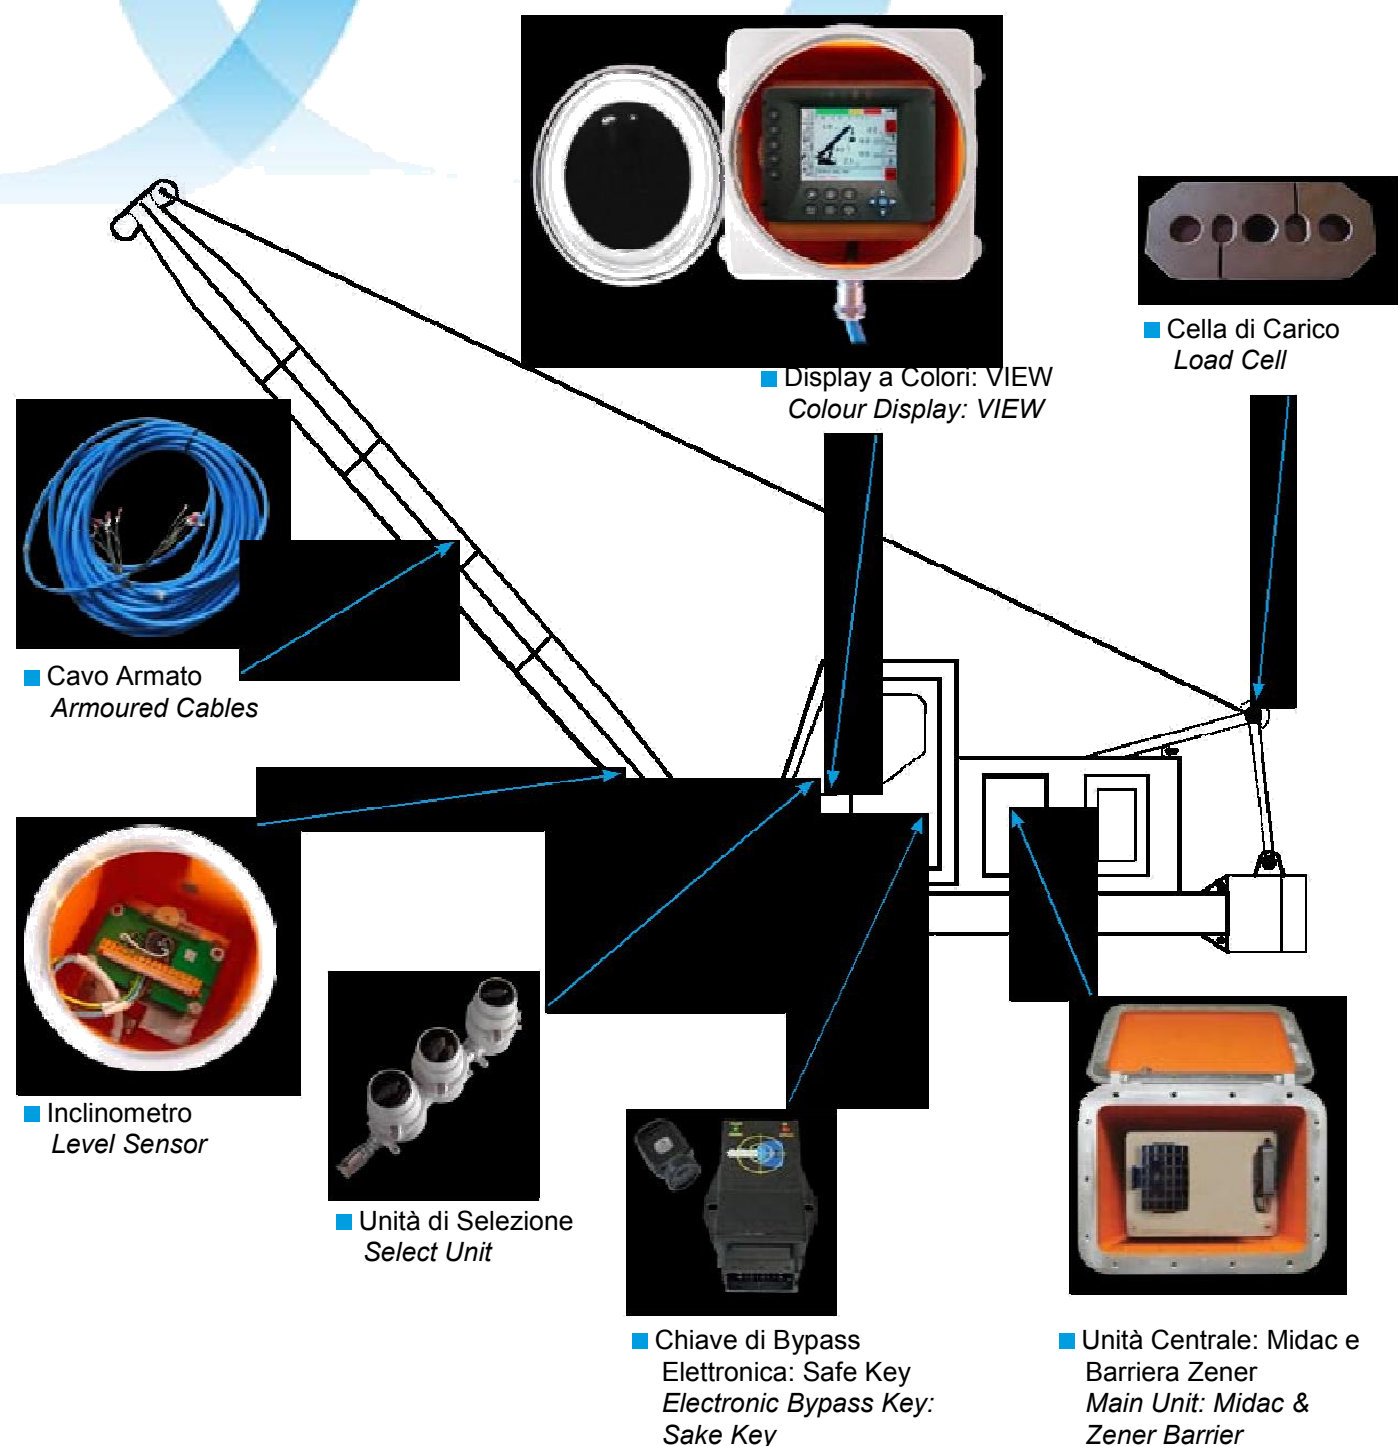


Caratteristiche Tecniche:

- Limitatore di carico per torrette off-shore
- Visualizzazione dati di lavoro (angolo, raggio, sfilo, carico sollevato, carico massimo) attraverso display grafico a colori
- Cella di carico protette da barriere Zener
- Connessioni tramite cavi armati
- Componenti dell'impianto anti-deflagranti mediante custodie serie GUB V costruite in lega di alluminio UNI 4514, UNI 3019, UNI 3051 o UNI 3599 esente da rame, standard verniciatura epossidica RAL 7035, viti di collegamento di terra interna/esterna sono in acciaio inox AISI 604 UNI 7323
- Black Box

Technical Features:

- Off-Shore turret rated capacity indicator
- Work data visualization (angle, radius, extension, lifted load, maximum load) on graphic and colour display
- Load cells protected by Zener barriers
- Armed cables provided
- Explosion proof houses with The GUB V series enclosures made of UNI-4514, UNI-3019, UNI-3051 or UNI-3599 copper-free aluminium alloy with standard RAL 7035 epoxy coating. The internal/external earth screws are made of AISI 604 UNI 7323 stainless steel
- Black Box

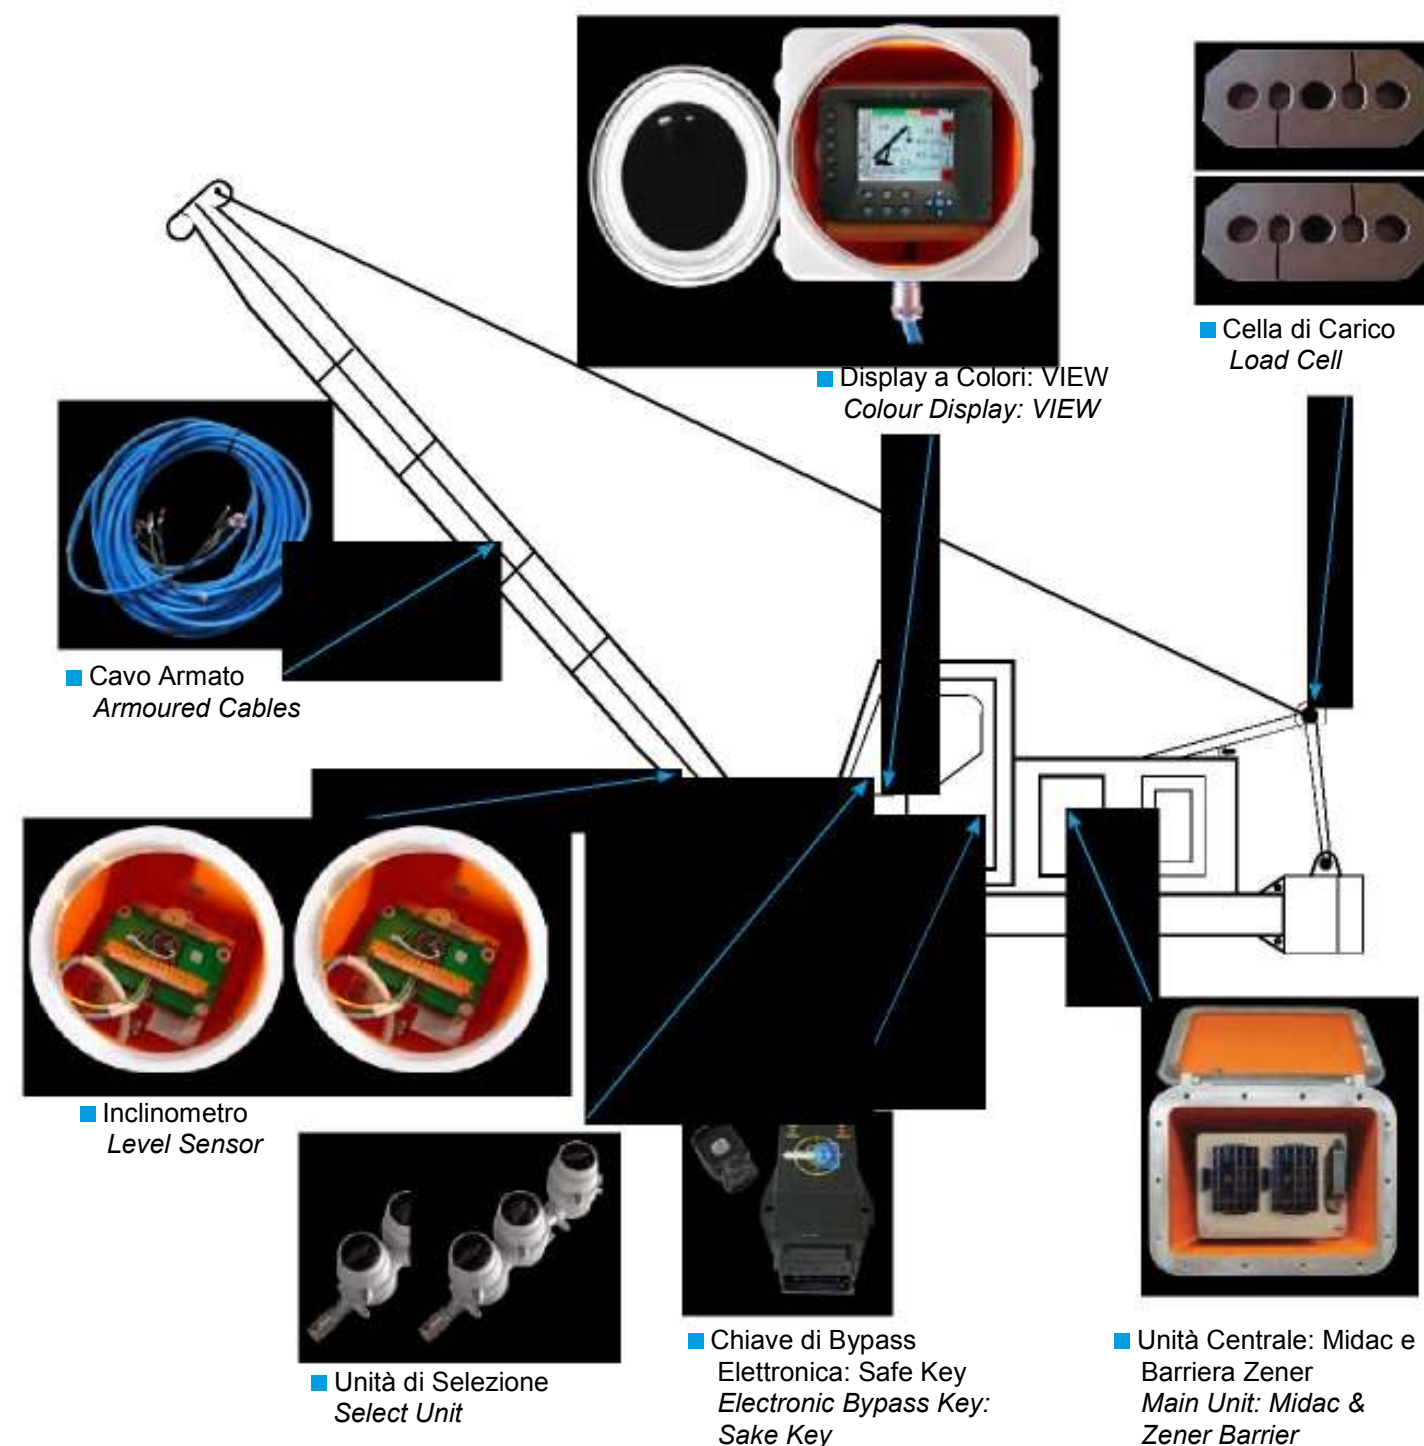

Caratteristiche Tecniche:

- Limitatore di carico per torrette off-shore
- Visualizzazione dati di lavoro (angolo, raggio, sfilo, carico sollevato, carico massimo) attraverso display grafico a colori
- Cella di carico protette da barriere Zener
- Connessioni tramite cavi armati
- Componenti dell'impianto anti-deflagranti mediante custodie serie GUB V costruite in lega di alluminio UNI 4514, UNI 3019, UNI 3051 o UNI 3599 esente da rame, standard verniciatura epossidica RAL 7035, viti di collegamento di terra interna/esterna sono in acciaio inox AISI 604 UNI 7323
- Black Box
- Controllo Ridondante

Technical Features:

- Off-Shore turret rated capacity indicator
- Work data visualization (angle, radius, extension, lifted load, maximum load) on graphic and colour display
- Load cells protected by Zener barriers
- Armed cables provided
- Explosion proof houses with The GUB V series enclosures made of UNI-4514, UNI-3019, UNI-3051 or UNI-3599 copper-free aluminium alloy with standard RAL 7035 epoxy coating. The internal/external earth screws are made of AISI 604 UNI 7323 stainless steel
- Black Box
- Redundant Control System